

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number
WO 03/106122 A1(51) International Patent Classification⁷: **B26D 3/16, 7/18**(74) Agents: **MANNUCCI, Michele et al.; UFF. Tecn. Ing. A. Mannucci S.r.l., Via della Scala, 4, I-50123 Firenze (IT).**(21) International Application Number: **PCT/IT03/00343**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 3 June 2003 (03.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
FI2002A000102 13 June 2002 (13.06.2002) IT

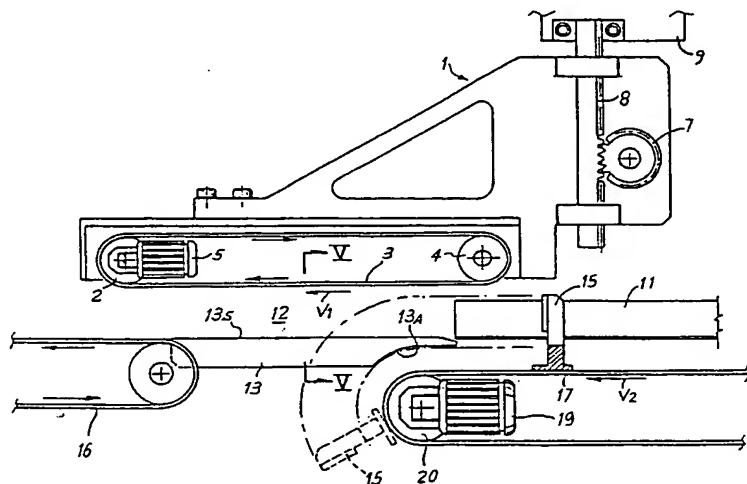
(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): **FABIO PERINI S.p.A. [IT/IT]; Zona Ind.le P.I.P Mugnano Sud, I-55100 Lucca (IT).**

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR ELIMINATING END TRIMMINGS FROM A ROLL OR THE LIKE

WO 03/106122 A1

(57) Abstract: The device comprises: a path (12) for the products, extending from products and trimmings entry position and a product deliver position, the trimmings being removed between said two positions; along said path, a movable flexible member (3) to retain and move the products and the trimmings and an opposite longitudinal fixed element (13) to retain said trimmings (R) extending along said path parallel to a first branch of said flexible member, at a distance from it to allow the products to advance in contact with said flexible member and with said fixed longitudinal element; at least a pusher (15) movable along a feed trajectory, to feed the series of products with the respective trimmings to said path (12). The pusher feeds the products and the trimmings between the flexible member (3) and the fixed longitudinal element (13), overlapping in the final stretch the path of the products in contact with said flexible member and said fixed longitudinal element.